


italbedis®

WATER. NATURALLY. SINCE 1989.

DISPENSER

Ecological solutions for
automatic distribution





Reviewed: February 2024

Line **DISPENSER**

Ecological solutions for **automatic distribution**

italbedis®

WATER. NATURALLY. SINCE 1989.



www.italbedis.it

INDEX

Introduction.....	pag 8
Ecological solutions for drinking water.....	pag 9
COOLING technologies.....	pag 11
SUPPLY technologies.....	pag 12
UV LED SYSTEM technologies.....	pag 14
DOMESTIC use.....	pag 15
H2ONDA Slim.....	pag 16
FLUX Slim.....	pag 17
OFFice use.....	pag 18
H2ONDA.....	pag 20
H2ONDA Hot.....	pag 21
FLUX.....	pag 22
H2ONDA - FLUX Office.....	pag 23
H2OFFICE.....	pag 24
PROFESSIONAL use.....	pag 25
FLUX 20.....	pag 26
EUROS 40-80-120 mechanical version.....	pag 27
EUROS 40-80-120 electric version.....	pag 28
EUROS 80-120 DOUBLE electric version.....	pag 29
EUROS 40-80 dry beer.....	pag 30

TECHNOLOGICAL use.....	pag	31
EUROS 150	pag	32
RESIA.....	pag	33
UNDER SINK use.....	pag	35
H2ONDA - H2ONDA Slim.....	pag	36
FLUX 20	pag	37
STAR - EUROS 40-80-120.....	pag	38
ACQUA ICE 40.....	pag	39
DISPENSING COLUMNS.....	pag	40
INDUSTRIAL DISPENSING COLUMNS.....	pag	41
FLUID TAP.....	pag	42
HIGH PRODUCTION use.....	pag	43
EUROS 200	pag	44
EUROS 300.....	pag	45
COMMUNITY use	pag	47
SPRING.....	pag	48
SCHOOL.....	pag	49
CABINET.....	pag	51
CABINET WITH FRONT DOOR - EQUIPPED CABINET	pag	52
CABINET WHEEL - SUPPORT.....	pag	53
Note.....	pag	54




italbedis®

WATER, NATURALLY. SINCE 1989.




ITALBEDIS

FROM THE 1989 ITALBEDIS IS
SPECIALIZED IN **WATER TREATMENT**.
ISO 9001 AND ISO 22000 CERTIFICATION
**GUARANTEE RELIABILITY AND
PROFESSIONALISM.**




Water coolers

Dispensers connected to the water supply network that **instantly supply cold, still and sparkling water**. They guarantee a better quality of water combined with the more suitable filtering system, **besides offering convenience and saving** for all uses: **domestic, offices, bars, restaurants, canteens, public places and many more.**




Water Filters

Each range of filters has been designed to meet specific needs for a variety of uses from the well-known, popular **REFINER®**, a refiner filter for “**drinking water**”, to more **technical products intended for selective treatments** (control or removal of hardness, arsenic nitrates and many more).



Reverse Osmosis System

Reverse Osmosis systems regulate or eliminate the presence of dissolved salts in the water and represent a necessary and **effective solution** for numerous applications, to guarantee the quality of the product and/or preserve work equipment in the **Ho.Re.Ca. and industrial sectors.**

 All ITALBEDIS products are Made in Italy and certified in accordance with the current regulations on the European Market.

ECOLOGICAL SOLUTIONS FOR DRINKING WATER



Why “treat” drinking water?

The drinking water from our taps comes from different sources and is collected, controlled and guaranteed by the authorities in charge. It is a water naturally rich in beneficial substances and mineral salts; however, in its path it can be contaminated by harmful substances due to the pollution of the aquifers, to the releases of the

pipes of the network or by the same chlorine that the distribution companies must add for the maximum guarantee of potability.

The system with microfiltration REFINER allows to obtain biotreated and bacteriologically pure water, without ionizers and mineralizers.

Which are the advantages of filtration?

Besides guaranteeing quality and wellbeing, filtered water allow:

- The elimination of waste;
- Optimisation of space in the cupboard of fridge;
- A reduction in spending on costly bottle water;
- The elimination of plastic bottles, thus helping to reduce pollution caused by their disposal.
- To always have fresh water, which is never stagnant (as opposed to bottled water)

When to use filtered water?

- At home, for drinking and cooking.
- For serving in bars, restaurants, canteens or public places.
- For preserving work equipment (coffee machines, cooking ovens, for dental clinics, etc.).

IN THREE WORDS:

QUALITY / CONVENIENCE / SAVING



STORAGE TANK

THE COOLING TECHNOLOGY OF THE WATER CHARACTERIZED BY THE EXTREME SIMPLICITY OF THE OPERATION.

This system receives the water from the supply that is carried in a steel tank with a insulating coating, where is cooled.

The insulated tank keeps the water at low temperature. Storage tank cooling system is particularly suitable for dispensing cold water up to 15 liters/hour.

Water Cooler with this technology:

H2Onda Slim • Laguna Slim • H2Onda • Laguna • Nevada • Star • Spring

COOLING TECHNOLOGY

ICE BANK

HIGH PERFORMANCE COOLING SYSTEM.

This cooling technology cools considerable quantities of water and enables the dispensing temperature to be kept constant even when continuously dispensing many liters. The ICE BANK cooling system consists of a stainless steel coil and a copper coil immersed in a reservoir full of water.

The copper coil containing the refrigerant gas freezes the water contained within the reservoir producing a cold supply, which in turn cools the drinking water owing through the stainless steel coil. In this way the water cooler offers greater performance and in particular it ensures quality and hygiene of the water which is continuously flowing and never stagnating.

Water Coolers with this technology:

Jet20 • Acqua Ice40 • Euros40 • Euros80 • Euros120 • Euros150 • Resia • Euros200 • Euros300



italbedis®
WATER, NATURALLY. SINCE 1989.



ELECTRONIC

THANKS TO AN EASY DISPLAY THIS SYSTEM ALLOWS TO CHECK ELECTRONICALLY THE AMOUNT OF WATER DISPENSED AND OTHER PARAMETERS, CUSTOMIZING THE FUNCTIONS OF THE WATER COOLER.

The dose of water can be programmed, according to the volume of the container used (e.g. bottles, jug, etc.) Dosing with volumetric mode ensures a correct and constant quantity of water even in case of pressure changes.

A system managed entirely electronically allows to check the following features:

- possible lack of water
- possible lack of CO₂
- filter anomaly
- UV lamp anomaly
- dispensed liters counting

The consumer can regulate:

- dispensed water temperature
- carbonation intensity
- supply types: free or with pre-dose



SUPPLY TECHNOLOGY

ELECTRIC

THANKS TO PRACTICAL BUTTONS THIS SYSTEM ALLOWS TO SUPPLY TWO OR MORE TYPES OF WATER.



ELECTRIC PRE-DOSAGE

EVOLUTION OF THE CLASSIC ELECTRIC SYSTEM, THE PRE-DOSING TECHNOLOGY ALLOWS THE SETTING OF THE VOLUME OF WATER TO BE SUPPLIED FOR EACH OF THE THREE WATERS, IN AN INDEPENDENT WAY.



MECHANICAL

THANKS TO THE TAPS, COUNTER OR UNDERSINK VERSION, THIS SYSTEM ALLOWS TO DISPENSE WATER MANUALLY: ROOM TEMPERATURE, COOL AND SPARKLING WATER.



NO-TOUCH

ON REQUEST, OUR DISPENSERS CAN BE EQUIPPED WITH TOUCHLESS BUTTONS: THE SUPPLY OF WATER IS ACTIVATED SIMPLY BY CLOSING THE FINGER TO THE SELECTED KEY, WITHOUT PRESSING IT.



UV-LED-SYSTEM TECHNOLOGY


- 1 This system combines **the innovative LED light technology with the germicidal power of UV-C emission.**
- 2 The bacteriostatic effect occurs thanks to the wavelength at 275 nm of the device, which is included in the range 200-300 nm, absorbed by the DNA.
- 3 The device constitutes a barrier to 99.99% of the more frequent contaminating pathogens, including chlor-resistant ones.
- 4 The prolonged action of the light emitted by the LEDs protects the system from bacterial back-contamination phenomena and contributes to the delivery of water, complying with with legal parameters.

The system can be positioned in various points of the system:

System's position: before the water cooler



System's position: on the spout

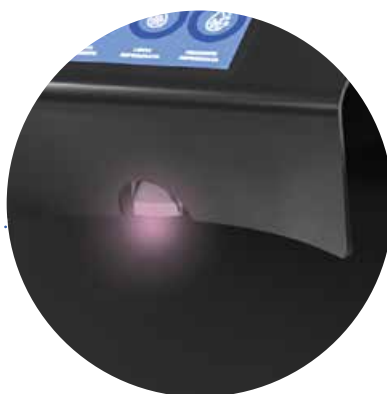

**UV
LED
SYSTEM**

The device complies with the following directives and decrees:

- **2006/95 / EC** (Low Voltage Directive)
- **2002/95 / EC** (Rohs Directive)
- **Ministerial Decree 174/2004** (Regulation concerning the materials that can be used in fixed collection systems, treatment, adduction and distribution of water intended for human consumption).





italbedis®
WATER, NATURALLY. SINCE 1989.

DOMESTIC Use

ITALBEDIS HAS THE PERFECT SOLUTION TO SATISFY EVERY NEED. THE PLEASURE OF **MICROFILTERED AND FRESH WATER** ALSO AT HOME.

UPPERCOUNTER WATERCOOLER

H2ONDA Slim



H2Onda Slim is born from the combination of elegance and quality, a dispenser with small dimensions and modern design that fits perfectly with the decor of any home.

The equipped is with an anti-flooding system and UV LED Spider bactericidal system as standard.

Colors combinations available



Dispenser	Production of cooled water	Cooling	Capacity of the storage tank	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 H2Onda Slim Plus	15 l/h	Storage tank	1,6 l	1/20 Hp	100 l/h	0,8 l	16 kg	20x39x44 cm
 H2Onda Slim Natural	15 l/h	Storage tank	2,5 l	1/20 Hp	100 l/h	Not present	13 kg	20x39x44 cm

*drip tray included



USABLE WITH REFINER:
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. MAX inlet temperature: 35°C. MAX operating pressure: 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

UPPERCOUNTER WATERCOOLER

FLUX

Slim





Big performance for small spaces:
ideal for your kitchen. **Flux Slim** is an ultra-compact dispenser designed for domestic use. Connected to the water supply, it offers still, cold, or sparkling water.

As standard, it is equipped with an anti-flooding system and the UV LED Spider bactericidal system.

Colors combinations available



Dispenser	Production of cooled water	Cooling	Capacity of the storage tank	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Flux Slim Plus	15 l/h	Storage tank	1,6 l	1/20 Hp	100 l/h	0,8 l	16 kg	20x39x44 cm
 Flux Slim Natural	15 l/h	Storage tank	2,5 l	1/20 Hp	100 l/h	Not present	13 kg	20x39x44 cm

*drip tray included



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.



italbedis®

WATER. NATURALLY. SINCE 1989.



OFFICE Use

AN INNOVATIVE AND
ORIGINAL LINE OF DISPENSER,
ADAPTABLE TO ANY PLACE,
AND ACTIVITIES.

UPPERCOUNTER WATERCOOLER

H2ONDA




Its unique thermoplastic polyester front can be personalized according to the customer's preference

As standard, the dispenser is equipped with anti-flooding and LED bactericidal system



Colors combinations available



Dispenser	Production of cooled water	Cooling	Capacity of the storage tank	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 H2Onda Plus	15 l/h	Storage tank	1,6 l	1/20 Hp	100 l/h	0,8 l	21 kg	28x48x41 cm
 H2Onda Natural	15 l/h	Storage tank	2,5 l	1/20 Hp	100 l/h	Not present	18 kg	28x48x41 cm

*drip tray included



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. MAX inlet temperature: 35°C. MAX operating pressure: 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

UPPERCOUNTER WATERCOOLER

H2ONDA

Hot



PRESS AT THE SAME TIME
THE TWO BUTTONS FOR HOT
WATER



For everyone who likes to enjoy a hot drink, the ideal alternative is H2Onda Hot.

The design solution that comes from the reliability of a consolidated and functional model such as our H2Onda with the added possibility of supplying hot water, so ideal for infusing tea and herbal teas. Performance and quality from the first water delivery.

The equipment is equipped with an anti-flooding system and UV LED Spider bactericidal system as standard.



Colors combinations available



Dispenser	Production of cooled water	Cooling	Capacity of the storage tank	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 H2Onda Plus Hot	15 l/h	Storage tank	1,6 l	1/20 Hp	100 l/h	0,8 l	23 kg	28x48x41 cm
 H2Onda Natural Hot	15 l/h	Storage tank	2,5 l	1/20 Hp	100 l/h	Not present	20 kg	28x48x41 cm

*drip tray included



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

UPPERCOUNTER WATERCOOLER

FLUX



Flux is the uppercounter dispenser with an Italian design that combines the need for a high performance to compactness. Compact and functional, this dispenser connects to the water network to supply cold, still or sparkling water.

The equipment is equipped with an anti-flooding system as standard and the UV LED Spider bactericidal system



Colors combinations available



Dispenser	Production of cooled water	Cooling	Capacity of the storage tank	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Flux Plus	15 l/h	Storage tank	1,6 l	1/20 Hp	100 l/h	0,8 l	21 kg	28x46x41 cm
 Flux Natural	15 l/h	Storage tank	2,5 l	1/20 Hp	100 l/h	Not present	18 kg	28x46x41 cm

*drip tray included



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

COLUMN WATERCOOLER

H2ONDA - FLUX

Office







Made in Italy technology and design for two practical and functional dispensers for the office. This water dispenser combines aesthetics with practicality: it can be positioned on the appropriate coordinated cabinet assuming the column configuration. Essential and functional: H2Onda and Flux OFFICE are connected to the water supply by offering high performance. The ideal chillers for those who want to combine elegance and practicality. H2Onda and Flux OFFICE are also available in the elegant black version. As for the white version the cabinet is designed to accommodate the CO2 bottle and the filter.

The equipment is equipped with an anti-flooding system as standard and the UV LED Spider bactericidal system.



Available color combinations



Dispenser	Production of cooled water	Cooling	Capacity of the storage tank	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 H2Onda Plus	15 l/h	Storage tank	1,6 l	1/20 Hp	100 l/h	0,8 l	21 kg	28x48x41 cm
 H2Onda Natural	15 l/h	Storage tank	2,5 l	1/20 Hp	100 l/h	Not present	18 kg	28x48x41 cm
 Flux Plus	15 l/h	Storage tank	1,6 l	1/20 Hp	100 l/h	0,8 l	21 kg	28x46x41 cm
 Flux Natural	15 l/h	Storage tank	2,5 l	1/20 Hp	100 l/h	Not present	18 kg	28x46x41 cm
*drip tray included							mobile sizes (LxPxH)	
							29x40x82 cm	



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

COLUMN WATERCOOLER H2OFFICE



VENDING MODEL: predisposition for connection to payment systems with executive protocol.



H2Office column cooler with a minimal, practical and functional design, particularly suitable for the office, thanks to its essential and aesthetically pleasing shape. The cooler guarantees at all times room temperature water, chilled still water and, for the Plus version, also chilled sparkling water. Suitable for any format: glass, bottles or carafes.

The equipment is characterized by:


- Vandal resistant buttons
- UVC LED bactericidal system near the dispensing point which protects the system from bacterial retro-contamination phenomena
- Overflow kit complete with collection tank
- Compartment for housing the CO2 cylinder (for the Plus version) and the filtration system

Optional: pre-dosing with display.

The Plus and Natural models are also available in the vending version: predisposed for connection to payment systems with executive protocol.



Possibility of customization



Dispenser	Production of cooled water	Cooling	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 H2Office Plus	25 l/h	Direct exchange	1/8 Hp	150 l/h	1,5 l	30 kg	35x29x122 cm
 H2Office Natural	25 l/h	Direct exchange	1/8 Hp	150 l/h	Not present	27 kg	35x29x122 cm



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.



italbedis®
WATER, NATURALLY. SINCE 1989.

PROFESSIONAL Use

IDEAL FOR EVERYONE WHO WANTS **COMFORT AND CONVENIENCE**. THE BEST SOLUTIONS IN THE HO.RE.CA. WORLD FOR THE REQUEST OF BIG QUANTITY OF WATER, USING THE TECHNOLOGY OF THE ICE BANK.


UPPERCOUNTER WATERCOOLER


FLUX 20



Compact and pleasant design for this watercooler dedicated to a professional use. For everyone who wants to keep up with any news: it is ecological and functional and able to supply room temperature or cool, still or sparkling water.

Colors combinations available



Dispenser	Production of cooled water	Cooling	Ice bank capacity	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Flux 20	20 l/h	ice bank	2,5 kg	1/8 Hp	150 l/h	1 l	23 kg	20x54x41 cm

*drip tray included



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

UPPERCOUNTER WATERCOOLER

EUROS

40-80-120

mechanical version









The water supply, in the two refrigerated modes (smooth-sparkling) and ambient, takes place through practical mechanical taps.

Quick and easy installation thanks to the positioning of all water and electrical connections in the back of the dispenser.

Specifically: ice bank filling tank connection, ice bank water level indicator, water supply connection, CO2 supply connection and electricity network connection.



Dispenser	Production of cooled water	Cooling	Ice bank capacity	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Euros 40	40 l/h	ice bank	6 kg	1/8 Hp	150 l/h	1,5 l	25 kg	28x57x50 cm
 Euros 40 Natural	40 l/h	ice bank	6 kg	1/8 Hp	150 l/h	Not present	23 kg	28x57x50 cm
 Euros 80	80 l/h	ice bank	8 kg	1/6 Hp	150 l/h	1,5 l	30 kg	32x67x56 cm
 Euros 80 Natural	80 l/h	ice bank	8 kg	1/6 Hp	150 l/h	Not present	28 kg	32x67x56 cm
 Euros 120	120 l/h	ice bank	11,5 kg	1/4 Hp	200 l/h	2 l	35 kg	36x72x61 cm
 Euros 120 Natural	120 l/h	ice bank	11,5 kg	1/4 Hp	200 l/h	Not present	33 kg	36x72x61 cm

*drip tray included



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. MAX inlet temperature: 35°C. MAX operating pressure: 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

UPPERCOUNTER WATERCOOLER

EUROS

40-80-120

electric version






When tradition is combined with innovation. Our most consolidated supply technology, through the practical electric buttons, combined with the pre-dosing system.

In this configuration the dispenser can be with:

- volume control.
- time control.



Dispenser	Production of cooled water	Cooling	Ice bank capacity	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Euros 40	40 l/h	ice bank	6 kg	1/8 Hp	150 l/h	1,5 l	25 kg	28x57x50 cm
 Euros 40 Natural	40 l/h	ice bank	6 kg	1/8 Hp	150 l/h	Not present	23 kg	28x57x50 cm
 Euros 80	80 l/h	ice bank	8 kg	1/6 Hp	150 l/h	1,5 l	30 kg	32x67x56 cm
 Euros 80 Natural	80 l/h	ice bank	8 kg	1/6 Hp	150 l/h	Not present	28 kg	32x67x56 cm
 Euros 120	120 l/h	ice bank	11,5 kg	1/4 Hp	200 l/h	2 l	35 kg	36x72x61 cm
 Euros 120 Natural	120 l/h	ice bank	11,5 kg	1/4 Hp	200 l/h	Not present	33 kg	36x72x61 cm

*drip tray included



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. MAX inlet temperature: 35°C. MAX operating pressure: 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

UPPERCOUNTER WATERCOOLER

EUROS

80-120 DOUBLE

electric version






When tradition is combined with innovation. The device allows for the simultaneous dispensing of two types of water. Our most consolidated supply technology, through the practical electric buttons, combined with the pre-dosing system.

In this configuration the dispenser can be with:

- volume control.
- time control.



Dispenser	Production of cooled water	Raffreddamento	Ice bank capacity	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Euros 80 Double	80 l/h	ice bank	8 kg	1/6 Hp	150 l/h	1,5 l	30 kg	32x67x48 cm
 Euros 80 Double Natural	80 l/h	ice bank	8 kg	1/6 Hp	150 l/h	Not present	28 kg	32x67x48 cm
 Euros 120 Double	120 l/h	ice bank	11,5 kg	1/4 Hp	200 l/h	2 l	35 kg	36x72x53 cm
 Euros 120 Double Natural	120 l/h	ice bank	11,5 kg	1/4 Hp	200 l/h	Not present	33 kg	36x72x53 cm

*drip tray included



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. MAX inlet temperature: 35°C. MAX operating pressure: 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

UPPERCOUNTER WATERCOOLER

EUROS DRY BEER

40-80

mechanical version



From the reliability of a consolidated and functional model like our EUROS comes the dedicated version for lovers of draft beer: **EUROS DRY BEER**. A smart and high-performance dispenser which can supply microfiltered cool water both still and sparkling and high-quality beer.



Color available



Dispenser	Production of cooled water	Cooling	Ice bank capacity	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Euros 40	40 l/h	ice bank	6 kg	1/6 Hp	150 l/h	1,5 l	24 kg	28x57x50 cm
 Euros 80	80 l/h	ice bank	8 kg	1/8 Hp	150 l/h	1,5 l	30 kg	32x64x56 cm

*drip tray included



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.



italbedis®

WATER. NATURALLY. SINCE 1989.

TECHNOLOGICAL Use

THE PERFECT MIX BETWEEN DESIGN AND
INNOVATION, ITALBEDIS PROPOSES ITS
TECHNOLOGICAL LINE FOR A SIMPLY PURE QUALITY.

COLUMN WATERCOOLER

EUROS 150



Producing around 150 l/h of water (both room temperature and cool, still and sparkling), this column dispenser is an indicator of quality, practicality and comfort.

It has:

- anti vandals button;
- pre-dosing volumetric system, which allows to program the dose of dispensing.

On request the Euros **150 CONDO** version is available. It is the perfect solution for everyone who wants to drink good and microfiltered water also in condos. The water cooler has a key which allows to supply water with a special card.



Model	Disbursements	Taps
Ho.Re.Ca		3
Mono		1
Natural Mono		1
Vending		1



Also available with integrated payment system with CARD or KEY



VENDING VERSION With predisposition for programming with a special key

Dispenser	Production of cooled water	Cooling	Ice bank capacity	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Euros 150	150 l/h	ice bank	11,5 kg	1/4 Hp	150 l/h	2 l	70 kg	50x45x165 cm
 Euros 150 Natural	150 l/h	ice bank	11,5 kg	1/4 Hp	150 l/h	2 l	70 kg	50x45x165 cm



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. MAX inlet temperature: 35°C. MAX operating pressure: 3,5 bar

NOTE: this equipment requires regular a periodical maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) it is suggested to keep it carefully sanitizing or provide for the replacement of the filter.

COLUMN WATERCOOLER

RESIA




Water dispenser dedicated to the vending sector capable of supply, at any time, fresh microfiltered water directly from the water network or from an internal tank. Equipped with a microfiltration system with activated carbon filters and RAPID SYSTEM connection, compartment for housing CO2 cylinder, touch screen display, stainless steel body and safety lock. 4 types of water: at room temperature, chilled still, sparkling refrigerated and lightly carbonated refrigerated. Predosing: possibility of choosing 4 doses.

The equipment is equipped with the UV LED Spider bactericidal system as standard, positioned on the point of use to protect against the retro-contamination. In addition there is the UV-LED DISINFECTION system to reduce any bacterial load in the water and the sterilization system of the point of use with the use of an ozone producer.

VIVA version.

This version allows you to dispense in addition to microfiltered water, also waters enriched with minerals or aromatic waters made with distillates of flowers and plants. Choice of 6 concentrates in bag in box, placed inside the distributor and selected from the rich assortment in the layout.



Dispenser	Production of cooled water	Cooling	Ice bank capacity	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
<p>Resia</p>	40 l/h	ice bank	6 Kg	1/8 Hp	150 l/h	1,5 l	80 kg	60x85x183 cm



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.



Use **UNDER SINK**

ITALBEDIS PROPOSES A RANGE OF DISPENSERS ALSO IN UNDERCOUNTER VERSION. EASY TO INSTALL, **THE IDEAL CHOICE TO OPTIMIZE THE SPACES** AND ALWAYS GUARANTEE QUALITY AND RELIABILITY.

UNDER SINK WATERCOOLERS

H2ONDA

H2ONDA

Slim



The solution that allows to leave free flat surfaces thanks to the wide range of manual columns that complete the product.

Color available



Dispenser	Production of cooled water	Cooling	Capacity of the storage tank	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 H2Onda Slim Plus	15 l/h	Storage tank	1,6 l	1/20 Hp	100 l/h	0,8 l	16 kg	20x26,5x44 cm
 H2Onda Plus	15 l/h	Storage tank	1,6 l	1/20 Hp	100 l/h	0,8 l	21 kg	28x34,5x41 cm
 H2Onda Natural	15 l/h	Storage tank	2,5 l	100 l/h	100 l/h	Not present	14 kg	28x34,5x41 cm



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. MAX inlet temperature: 35°C. MAX operating pressure: 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

UNDER-COUNTER WATERCOOLERS

FLUX 20



The watercooler for professional use that placed under the sink ensuring practicality and functionality. Thanks to Flux 20, in the undercounter version, your ideal water with three different supplies: room temperature, cool and sparkling.



Color available



Dispenser	Production of cooled water	Cooling	Capacity of the storage tank	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Flux 20	20 l/h	Storage tank	2,5 kg	1/8 Hp	150 l/h	1 l	23 kg	20x42x42 cm



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

UNDER SINK WATERCOOLER

STAR



Color available



Under-sink dispenser with two water supplies (room temperature and cool). Performance and performing qualities that express Made in Italy technology that distinguishes Italtedis products.



UNDER-COUNTER WATERCOOLERS

EUROS 40-80-120



Color available



Ice-bank technology for Ho.Re.Ca use. The mechanical taps complete the dispenser, leaving the bar restaurants counters free: practical and functional.



Dispenser	Production of cooled water	Cooling	Ice bank capacity	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Star	20 l/h	Storage tank	3 l	1/20 Hp	Not present	Not present	12 kg	21x33x48 cm
 Euros 40	40 l/h	ice bank	6 kg	1/8 Hp	150 l/h	1,5 l	25 kg	28x40x43 cm
 Euros 80	80 l/h	ice bank	8 kg	1/6 Hp	150 l/h	1,5 l	30 kg	32x50x48 cm
 Euros 120	120 l/h	ice bank	11,5 kg	1/4 Hp	200 l/h	2 l	35 kg	36x54x53 cm



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. MAX inlet temperature: 35°C. MAX operating pressure: 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

UNDER-COUNTER WATERCOOLERS

ACQUA ICE 40




A high performance dispenser designed and customized to meet the special needs of the automatic distribution sector. All fittings input and output, switches and the cold intensity regulator are positioned to simplify the installation and / or maintenance of the machine.



Color available



Dispenser	Production of cooled water	Cooling	Ice bank capacity	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Acqua Ice 40	40 l/h	ice bank	6 kg	1/8 Hp	150 l/h	1,5 l	25 kg	28x40x45 cm



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 / 4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

Dispensing Columns

In order not to give up on design and preserve your work space, Italbedis has studied and created its **DISPENSING COLUMNS LINE**, that is combinable with Euros dispensers in the undercounter version.

Our mechanical column was created from the union of an innovative and a more traditional design of delivery systems.

- Sizes (LXPXH tray is included):
230 x 240 x 550mm

**Column
mechanical**



The practical and innovative solutions in the electric and touch* versions allow you to optimize your work plans, ensuring functionality and high performance.

- Sizes (LXPXH tray is included):
220 X 220 X 470mm

**Column
electric**



Made in Italy design for a column that goes perfectly with any undercounter. It is possible to set free dispensing or with pre-dispensing. The column also allows for simultaneous delivery of different types of water.

- Sizes (LXPXH tray is included):
220 X 220 X 470mm

**TRIS Column
electric**



Dispensing Columns Industrial

Towers with a minimal but interesting design that allow to optimize the work spaces, obtaining space, functionality and practicality. Tray is always included.

- Sizes (LXPXH tray is included):
220 X 200 X 510mm

**Slim
Column**



- Sizes (LXPXH tray is included):
300 X 220 X 510mm

**Duetto
Column**



- Sizes (LXPXH tray is included):
300 X 220 X 510mm

**Tris
Column**



FLUID TAP

mechanical version

A range of stainless steel **taps** produced and studied by ITALBEDIS. Each tap reports the screen printing of the water supplied: natural, cold and sparkling.

Beer screen printing is also available.


Inside there is a ceramic cartridge for an optimal flow and ton reduce the risk of fouling.

- Dimensions (LXPXH) 30 x 50 x 200 mm


Color available



Graphics available



THREADED SLEEVE 5/8 mm



FITTING DIAMETER 8 mm



UTILIZZABILE SOLO
CON ACQUA POTABILE





italbedis®

WATER, NATURALLY. SINCE 1989.

HIGHT PRODUCTION Use

ITALBEDIS THINKS BIG THE IDEAL SOLUTION IN
THE RESTAURANT SERVICE.


PROFESSIONAL WATERCOOLER

EUROS 200



Top of the line for the production of micro-filtered water, refrigerated smooth and refrigerated sparkling. Watercooler for a professional use only, it guarantees maximum production capacity, satisfying also the more demanding requests. Maximum hygiene and simple maintenance.

Color available 

Dispenser	Production of cooled water	Cooling	Ice bank capacity	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Euros 200	200 l/h	ice bank	35 kg	3/4 Hp	400 l/h	3 l	65 kg	50x71x71 cm



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.

PROFESSIONAL WATERCOOLER


EUROS 300



Maximum production capacity in the professional use.
An undercounter high quality dispenser for high quality standards.

Color available



Dispenser	Production of cooled water	Cooling	Ice bank capacity	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Euros 300	300 l/h	ice bank	45 kg	1 Hp	400 l/h	3 l	75 kg	50x84x71 cm



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.





italbedis®

WATER. NATURALLY. SINCE 1989.

COMMUNITY Use

FROM OUR EXPERIENCE WAS CREATED
THE LINE DEDICATED TO COMMUNITIES:
PURE WATER IS ECOFRIENDLY. WATER IS
COMMUNITY, AND ITALBEDIS KNOWS IT.

FOUNTAIN DISPENSER

SPRING




Practical and ecological: Spring model is indicated in the community, with its gushing supply avoids the use of glasses.

As optional it is possible to request the additional faucet.

Colors available



Dispenser	Production of cooled water	Cooling	Capacity of the storage tank	Compressor power	Carbonator power	Power of the carbonator device	Weight	Sizes (LxPxH)*
 Spring	25 l/h	Storage tank	7,5 l	1/6 Hp	Not present	Not present	19 kg	32x32x97 cm



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.


WALL DISPENSER

SCHOOL



The ideal solution for school use, where the functionality is combined with the simplicity. A dispenser in painted aluminum that respects the environment and educates children about sustainability.


- Two versions are available
- SCHOOL UV
 - SCHOOL BASIC

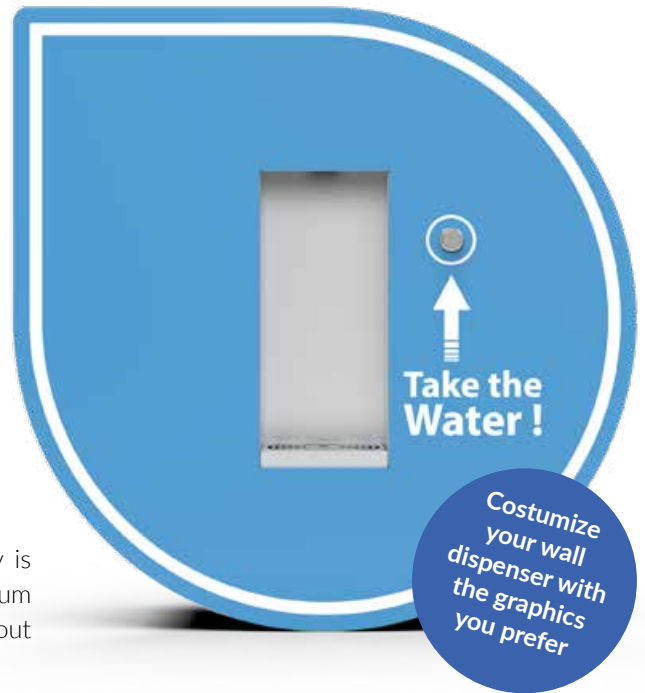

Dispenser	Filter head in PCS 1 pz	Bactericidal system UV Led Spider	Lamp UV Led	Analog meter	Drainpipe
School UV	•	•	•	•	•
School Basic	•	•	-	•	•



• Present - Not present

Dispenser	Production of cooled water (max)	Cooling	Ice bank capacity	Com-pressor power	Carbonator power	Power of the carbonator device	Wei-ght	Sizes (LxPxH)*
 School	180 l/h	Not present	Not present	Not present	Not present	Not present	14 kg	75x18 cm



USABLE WITH REFINER
REFINER 250 • 350 • 500



USABLE ONLY WITH
DRINKING WATER



Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 /4 week) to keep it carefully sanitizing or provide for the replacement of the filter.





italbedis

WATER, NATURALLY. SINCE 1989.

CABINET Use

OUR COMPANY OFFERS A RANGE OF CABINET FOR DISPENSERS. **AVAILABLE IN VARIOUS MEASURES** AND VARIATIONS, ACCORDING TO THE CUSTOMER NEEDS.

Cabinet with FRONT DOOR

- Size (LXPXH): 29x40x89,5 cm
- Magnetic closing
- Regulation rubber

EQUIPPED Cabinet

- Dimension (LXPXH): 29x40x89,5 cm
- Head filter
- Digital liter counter
- Tray drain
- Water and CO2 connection pipes
- Closure: magnetic
- Adjustment feet



SHINY BLACK



SHINY WHITE

Cabinet with WHEEL

- Dimension (LXPXH): 50x72x90 cm
- Included: Adjustment feet
- Optional: wheels



SUPPORT Cabinet

- Size (LXPXH): 29x35x82 cm
- Backside access
- Regulation rubber

Available colour



The companies of the Italtedis group are associated with



ASSOCIAZIONE COSTRUTTORI TRATTAMENTI ACQUE PRIMARIE

Italbedis S.r.l.

Via E. Ferrari, 4 • 37045 Z.A.I. • Legnago (VR) Italy
tel. +39 0442 629 012 • italbedis@italbedis.it



www.italbedis.it